(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 10 March 2005 (10.03.2005)

(10) International Publication Number WO 2005/020741 A2

(51) International Patent Classification7:

A45D

(21) International Application Number:

PCT/US2004/028930

(22) International Filing Date:

2 September 2004 (02.09.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 60/499,605

2 September 2003 (02.09.2003)

(71) Applicant and

(72) Inventor: RYAN-JAKIMAS, Kellie, Lee [US/US]; 6915 Oldo Atlanta Pkwy., Suwanee, GA 30024 (US).

(74) Agent: CONTE, James, B.; Barnes & Thornburg, LLP. P.O. Box 2789, Chicago, IL 60690 (US).

(81) Designated States (unless otherwise indicated, for every


AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Burasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, FL, FI, RO, SE, SI, SK, TR), QAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

without international search report and to be republished upon receipt of that report

Fur two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the begin-

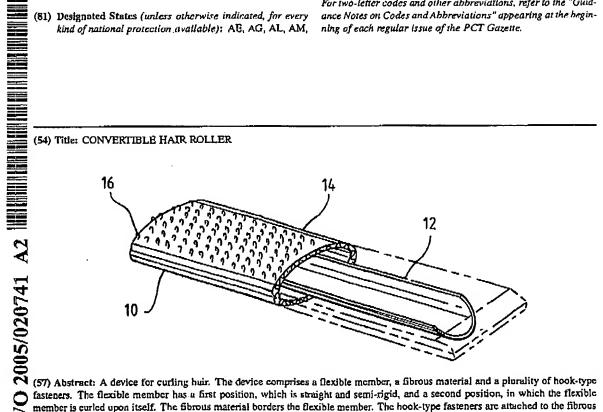

fasteners. The flexible member has a first position, which is straight and semi-rigid, and a second position, in which the flexible member is curled upon itself. The fibrous material borders the flexible member. The hook-type fasteners are attached to the fibrous material such that the fibrous material is between the flexible member and the hook-type fasteners.